

## X5R+



### Specifiche tecniche



Idroformato in lega di alluminio 6061 650b



ROCK SHOX 35 GOLD RL 29" Black esc. 160 mm, Solo Air, BOOST /ROCK SHOX SELECT PLUS RS Deluxe SEL+ RL 205X65DB2 MM 430TS B2



FRENI SHIMANO RT-EM600, F-203MM, R-203MM



SCHWALBE Front Magic mary 27.5\*2.8 / rear Hans Dampf 27.5\*2.8



SHIMANO SLX RD-M7100 12 Velocità



SHIMANO 10-51T



SHIMANO SC-E7000




SHIMANO E-8000



Sensore Torque + cadenza



SHIMANO BT-E8035 14Ah (500Wh)

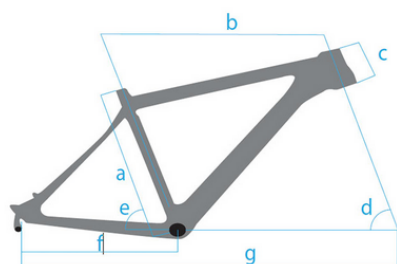

### Geometrie

SIZE	S	M	L
Frame Hight mma (a)	406	457	508
Top Tube Horizontal mm (b)	580	600	620
Head Tube Length mm (c)	120	120	120
Head Tube Angle (d)	67°	67°	67°
Seat Tube Angle (e)	72°	72°	72°
Rear End Length mm (f)	440	440	440
Wheel Size	27,5"	27,5"	27,5"