

X5R+ RACE



Specifiche tecniche



Iidroformato in lega di alluminio 6061 650b



ROCK SHOX LYRIK SELECT RC 29" (27,5+) Solo Air, Black esc. 160 mm, Debon Air, BOOST / ROCK SHOX SELECT PLUS RS Super Deluxe SEL+ RT 205X65DB2 MM 320TS B2



FRENI SHIMANO XT M820 F-203mm , R-203mm



SCHWALBE Front Magic mary 27.5*2.8 / rear Hans Dampf 27.5*2.8



SHIMANO XT RD-M8100 12 Velocità



SHIMANO 10-51T



SHIMANO SC-E7000




SHIMANO E-8000



Sensore Torque + cadenza



SHIMANO BT-E8035 14Ah (500Wh)

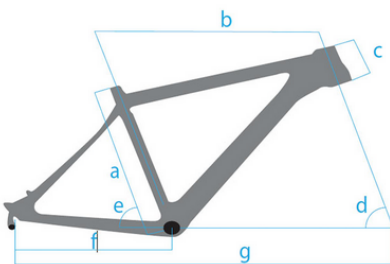

Geometrie

SIZE	S	M	L
Frame Hight mma (a)	406	457	508
Top Tube Horizontal mm (b)	580	600	620
Head Tube Length mm (c)	120	120	120
Head Tube Angle (d)	67°	67°	67°
Seat Tube Angle (e)	72°	72°	72°
Rear End Length mm (f)	440	440	440
Wheel Size	27,5"+	27,5"+	27,5"+